


**Technical Bulletin 50: Twin-Path Dimensions – Imperial 5:1 Design Factor**

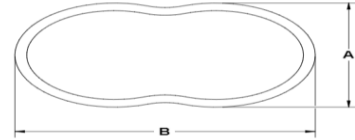

Twin-Path® Sling Stock No.	Vertical Rated Capacity (lbs)	Approximate Weight (Lbs. per Ft.) (Bearing - Bearing)	Dimension A Approximate Diameter/ Thickness (inches)	Dimension B Nominal Body Width (Inches)
TPXCF 1000	10,000	0.41	0.78	3
TPXCF 1500	15,000	0.46	0.86	3
TPXCF 2000	20,000	0.52	0.94	3
TPXCF 2500	25,000	0.67	1.01	4
TPXCF 3000	30,000	0.73	1.08	4
TPXCF 4000	40,000	0.86	1.20	4
TPXCF 5000	50,000	1.07	1.30	5
TPXCF 6000	60,000	1.20	1.40	5
TPXCF 7000	70,000	1.33	1.48	5
TPXCF 8500	85,000	1.61	1.56	6
TPXCF 10000	100,000	1.80	1.71	6
TPXCF 12500	125,000	2.31	1.87	8
TPXCF 15000	150,000	2.64	2.02	8
TPXCF 17500	175,000	2.96	2.16	8
TPXCF 20000	200,000	3.47	2.28	10
TPXCF 25000	250,000	4.12	2.52	10
TPXCF 27500	275,000	4.61	2.62	12
TPXCF 30000	300,000	4.93	2.73	12
TPXCF 40000	400,000	6.74	3.18	14
TPXCF 50000	500,000	8.40	3.58	16
TPXCF 60000	600,000	10.15	3.93	18
TPXCF 70000**	700,000	12.90	4.22	29
TPXCF 80000**	800,000	14.90	4.57	29

\*\* Tri-Path