

helping  
**TWIN-PAT EXTRA**  
®



HIGH PERFORMANCE FIBER SLINGS



**SLINGMAX**®  
RIGGING SOLUTIONS



# WHICH SLING WOULD YOU USE TO LIFT 50 TONS?






EACH SLING HAS A RATED CAPACITY OF 50 TONS!  
 EACH PERSON IS HOLDING THE SAME WEIGHT!  
 EACH SLING IS THE SAME LENGTH!



Guess which sling requires less effort to rig, has less chance of causing injury, is easiest to transport and store, and costs less to use?

## TWIN-PATH® EXTRA COVERMAX® SPECIFICATIONS

**PLEASE NOTE:** Capacities shown include both paths and are for one complete sling. Sling ratings based on fittings of equal or greater capacity. Conforms to ANSI/ASME B30.9 chapter 6, NAVFAC P-307 section 14.6.4.3, and the Cordage Institute Roundsling Standard.

Twin-Path® Extra Covermax® Stock No.	Rated Capacities (Lbs.) 5:1 DF					Approximate Weight (Lbs. per Ft.) (Bearing-Bearing)	Nominal Body Width (Inches)
	Vertical	Choker	Vertical Basket	Basket Hitches			
			90° 	60° 	45° 		
TPXC 1000	10,000	8,000	20,000	17,320	14,140	.40	1.5 - 3"
TPXC 1500	15,000	12,000	30,000	25,980	21,210	.45	1.5 - 3"
TPXC 2000	20,000	16,000	40,000	34,640	28,280	.51	1.5 - 3"
TPXC 2500	25,000	20,000	50,000	43,300	35,350	.57	1.5 - 3"
TPXC 3000	30,000	24,000	60,000	51,960	42,420	.71	2.0 - 4"
TPXC 4000	40,000	32,000	80,000	69,280	56,560	.83	2.0 - 4"
TPXC 5000	50,000	40,000	100,000	86,600	70,700	1.14	2.5 - 5"
TPXC 6000	60,000	48,000	120,000	103,920	84,840	1.27	2.5 - 5"
TPXC 7000	70,000	56,000	140,000	121,240	98,980	1.39	2.5 - 5"
TPXC 8500	85,000	68,000	170,000	147,220	120,190	1.65	3.0 - 6"
TPXC 10000	100,000	80,000	200,000	173,200	141,400	1.84	3.0 - 6"
TPXC 12500	125,000	100,000	250,000	216,500	176,750	2.35	4.0 - 8"
TPXC 15000	150,000	120,000	300,000	259,800	212,100	2.66	4.0 - 8"
TPXC 17500	175,000	140,000	350,000	303,100	247,450	3.14	5.0 - 10"
TPXC 20000	200,000	160,000	400,000	346,400	282,800	3.45	5.0 - 10"
TPXC 25000	250,000	200,000	500,000	433,000	353,500	4.07	5.0 - 10"
TPXC 27500	275,000	220,000	550,000	476,300	388,850	4.61	6.0 - 12"
TPXC 30000	300,000	240,000	600,000	519,600	424,200	4.92	6.0 - 12"
TPXC 40000	400,000	320,000	800,000	692,800	565,600	6.54	7.0 - 14"
TPXC 50000	500,000	400,000	1,000,000	866,000	707,000	8.15	8.0 - 16"



**SHIPBUILDING**




**MILITARY/  
AEROSPACE**



**RAILROADS**



**MANUFACTURING**

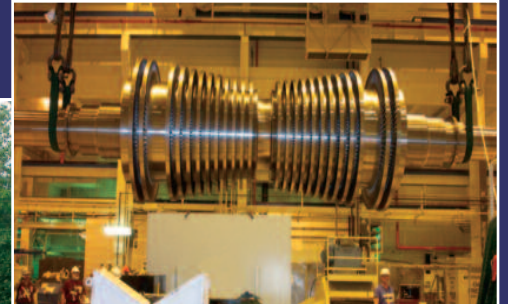

**UTILITIES**



**CONSTRUCTION**



**STEVEDORING**



**OFFSHORE**



**SALVAGE**



**STEEL MILLS**



**AUTO ASSEMBLY**



# TWIN-PATH® .... The Most Inspectable Slings




There are two kinds of tell-tail indicators—one to warn of overload and a fiber optic to warn of core fiber damage.



**New ✓Fast™** inspection with External Warning Indicator is an option that reacts to multiple conditions that can affect a synthetic sling.



The separate inner cover shows red for warning that the sling is damaged and should be taken out of service.



**Twin-Path®** slings are repaired with patches like this. Each sling is proof tested after a repair.

Also Available to help you rig  
**SAFER....**

**BETTER....**


**FASTER....**



**RIGGING TRAINING**  
"Prevention of Rigger Mortis"



**GATOR-LAID® SLINGS**

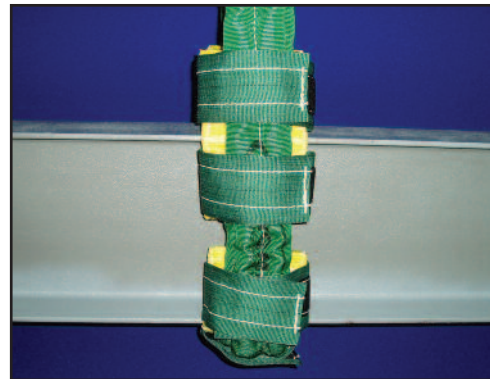

**CORNERMAX™ PADS**  
Also Synthetic Armor Pads

## SLINGMAX® INC.

P.O. BOX 2423 ASTON, PA 19014-2423 USA  
TEL: 800-874-3539 FAX: 610-494-5835  
TEL: 610-485-8500 WWW : <http://www.slingmax.com>

PRODUCTS ARE SOLD BY:

**SLINGMAX** ⚡  
RIGGING SOLUTIONS

SLINGMAX®, CornerMax™, Twin-Path®, Check-Fast System®, ✓Fast System®, Gator-Laid®, Gator-Flex®, Gator-Rex®, Kevlar®, Technora®, Spectra®, Twaron®, and Dyneema® are trademarks of and the property of their respective owners.